
# Bianca Shower Mixer With Divertor



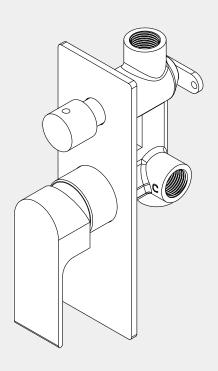


Versions:202405


#### Drawing Specifications **Group Item** Watermark License 1x Universal Body 94.7 1x Trim Kits Only WM-060073 70 **Temperature Rating** Min 1°C-Max 75°C **Pressure Rating** Min 150kpa - Max 500kpa Finish & SKU Chrome NR321511aCH Gun Metal NR321511aGM Brushed Nickel NR321511aBN Matte Black Brushed Gold Brushed Bronze NR321511aMB NR321511aBG NR321511aBZ

### Installation Instruction For Body Only

#### **GENERAL INSTRUCTIONS:**


- This product must be installed by a licensed plumber. Ensure that your plumbing installation conforms to the Australian/New Zealand Standard AS/NZS 3500.
- All pipework must be thoroughly flushed prior to the installation of the mixer. In-line filters must be fitted on both hot and cold supplies to prevent foreign particles from damaging the ceramic cartridge.
- All outlets used primarily for personal hygiene must deliver water at a safe temperature in accordance with regional regulations.

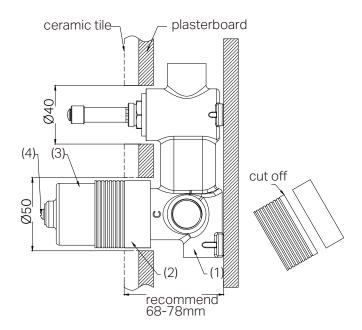




Caution: Do not remove protective sleeve (2) from the mixer body.

- 2. Connect the cold and hot water supply lines and perform a leak test.
- $3.Drill\ a\ \phi50mm\ and\ a\ \phi40mm\ hole\ in\ the\ plasterboard$  for mixer body, and then position plasterboard as shown in the above image.






4. When the installation depth is 68-70mm, make the protective sleeve (2) 2-4mm from ceramic tile surface to body.

when the installation depth is 71-78mm, make the protective sleeve (2) 4-7mm from ceramic tile surface to body.

Then waterproof the gap between the plasterboard and body.


5.Remove self-tapping screw, washer and protective sleeve, and cut the protective sleeve from the marked point.


6. Reattach self-tapping screw, washer and protective sleeve.



7. Waterproof for the gap the plasterboard and body.

## Installation Instruction For Trim Kits Only

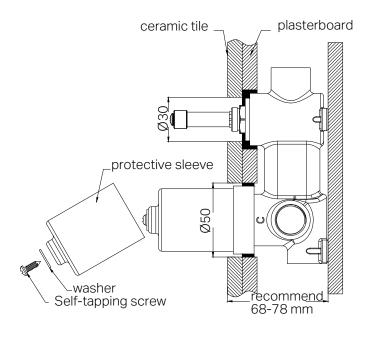

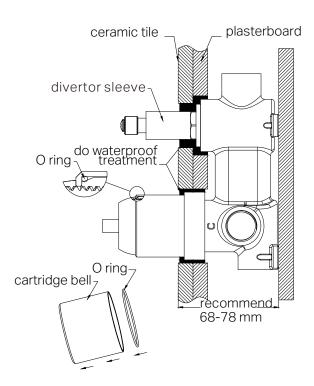

- 1. Drill a Ø50mm and a Ø30mm hole in the ceramic tile, then position it as shown in the above diagram.
- 2. Undo the self-tapping screw to remove the protective sleeve .
  - grub screw divertor knob plate washer grub screw cap
- 3. Insert the Oring to the Cartridge Bell groove, and slide the Cartridge bell onto cartridge and slide divertor sleeve onto divertor cartridge.
- 4. Apply waterproof treatment to the area indicated in the diagram above.
- 5. Thread the dressing cap on the cartridge bell.
- 6. Slide the backplate onto body.
- 7. Attach the washer to cartridge rod, position the handle, tighten it with a grub screw using an Allen key, and cap the grub screw hole.
- 8. Attach the divertor knob to divertor cartridge, tighten it with grub screw using Allen key, and cap the grub screw hole.

#### **MAINTENANCE AND CARE:**

- Regularly check the mixer and connections for signs of wear or leaks.
- Clean the tap with mild soapy water to maintain its appearance, avoiding harsh chemicals and abrasive materials that may damage the finish.

#### **FINAL INSPECTION:**

- Ensure the tap operates smoothly and that there are no leaks at the connections.
- Clean the area and the newly installed tap with a soft cloth to remove any installation residues.



