

Leda Care Invisi Series II®

Sanitary Facilities - Access and Mobility 4.5/3 litre Dual Flush Toilet Suite with Wall Faced Pan and Invisi Series II® Cistern



The 4.5/3 dual flush **Leda Care Invisi Series II®** matched suite is designed to provide a raised seat height of between 460-480mm for accessible applications . For compliance to AS 1428.1-2009 Amd. 1 it is necessary to locally extend the wall out to provide pan projection of 800mm ±10mm to the front of the pan. The pan connection system includes the patented Caroma Uni-Orbital® connector that extends to any position in a 25mm radius, unlike traditional connectors that only move backwards and forwards. The setout range is from 60mm – 170mm with a recommended setout of 90mm. Concealed cistern and plumbing fittings provide space saving, ease of cleaning and performance matched components to maximise flushing efficiency.

Important : Reference must be made to AS 1428.1-2009 with current amendments to determine circulation space, grab rail and installation requirements. The dimensions in this sheet may change with amendments to the standard.

Pan: Leda Care 4.5 litre full flush wash down box rim type.

Traps: Universal trap.

Inlet: 50mm back inlet. A 40mm kee-seal is available.

Cisterns: Invisi Series II® cistern – suitable for inwall, induct and inceiling applications.

Important: Working pressure minimum 30kPa to maximum 1000kPa flow pressure. Rain water tank compliant.

Buttons: Sold separately: See Section 16 - BUTTONS for further details.

Seats: Caravelle Care single flap or Caravelle Care double flap seat is provided as standard with this suite, and are available in Caroma White (W), Sorrento Blue (SB) and Anthracite Grey (AG). See Section 15 - SEATS for further details. Reference to AS1428.1-2009 must be made in regards to luminance contrast when selecting the seat colour.

Position of the Pan: For wheel chair access the installed pan must be a minimum of 800 ± 10mm from the front of the pan to the finished wall and provide a seat height of 460 to 480mm. For people with ambulant disabilities the pan can be fitted directly to the existing wall without the need to locally extend the wall. (See page 13.06 for further details).

Position of Cistern: The pan is suitable for installation with concealed cisterns providing the circulation space requirement is maintained. The height of the push button must be no greater than 1100mm to the top of the push button and positioned within the push button zone or on the centre line of the pan.


Colour: Pan available in white only.

Installation: The installation of the toilet suite shall be in accordance with the normal minimum drainline grade requirements in AS/NZS 3500.2.

Dimensions: All dimensions are in millimetres and are subject to normal manufacturing variations. Caroma pursues a policy of continuing improvement in design and performance of its products. The right is therefore reserved to vary specifications without notice.

Note: The projection requirements detailed on this illustration are for wheel chair access only. The projection requirements for people with ambulant disabilities is 610 to 660mm.

Leda Care Invisi Series II® Toilet Suite with Seat:	Code No.	Seat colour:
Caravelle Care Single Flap Seat	719105	W, SB or AG
Caravelle Care Single Flap Seat with Backrest Curved Arm	719105B	W, SB or AG
Caravelle Care Double Flap Seat	719100	W or SB

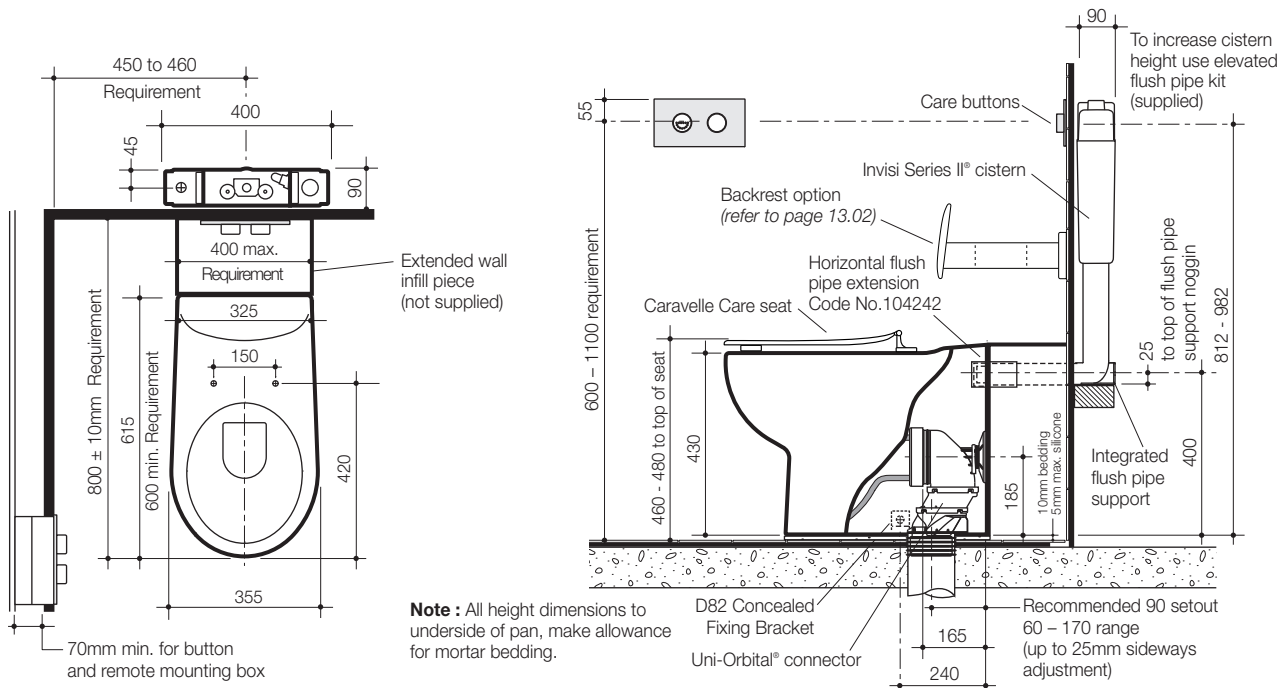

* Reference must be made to the AS 1428.1-2009 Amd 1 to confirm installation requirements.