
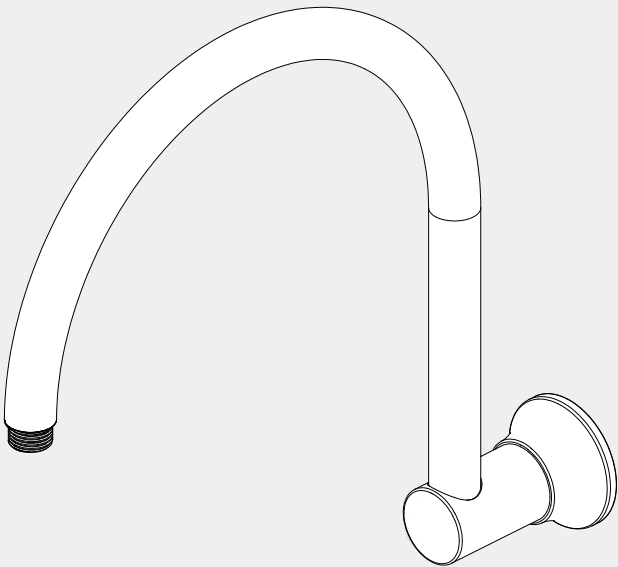


York Shower Arm

Nero

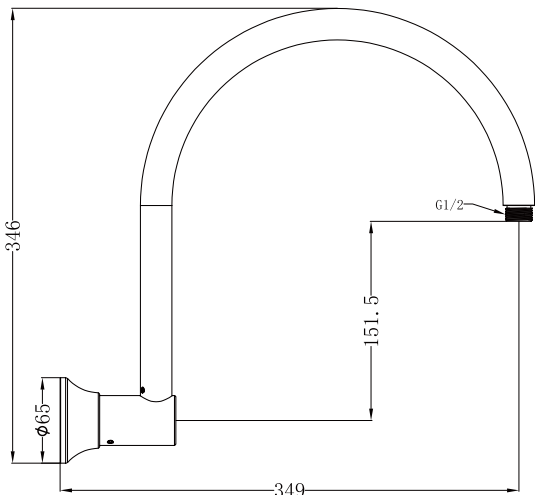


Versions:202401


Drawing	Specifications	Packaging Includes
	Temperature Rating Min 1°C-Max 75°C	1x Shower Arm
	Pressure Rating Min 150kpa - Max 500kpa	
Finish & SKU		
 Chrome NR508CH	 Matte Black NR508MB	 Aged Brass NR508AB
*Dimensions are nominal measurements only.		

*Dimensions are nominal measurements only.


Installation Instruction

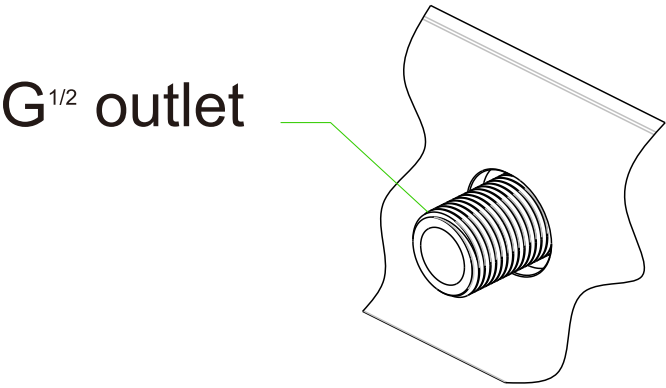

1. Apply thread sealant or teflon tape on outlet thread.

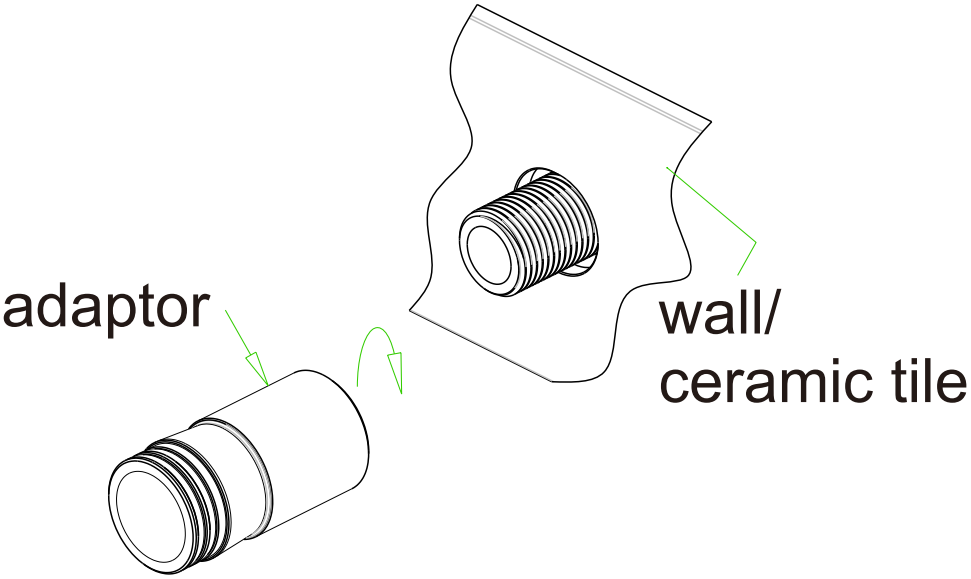


2. Screw adaptor on to outlet. Make sure the face of inlet is flush with wall/ceramic tile face.

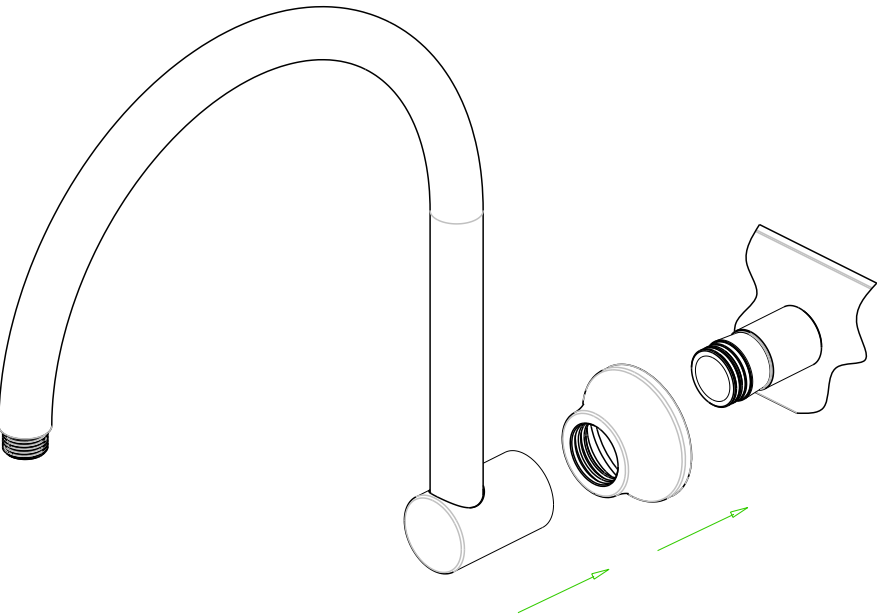

3. Pull back plate on together with shower arm.

4. Pull shower arm onto adaptor. Screw grub screw into spout by wrench and cover by silicone cap.

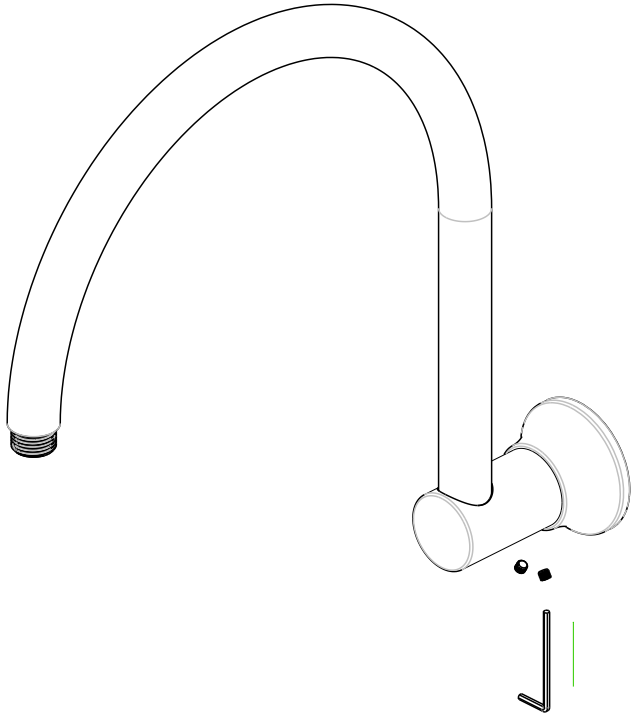

Nero

info@nerotapware.com.au
nerotapware.com.au

11-13 Buontempo Road
Carrum Downs Vic 3201

