

## Model RBA4110-993



### Materials & Features

Shower Rail set consists of a wall mounted stainless steel 900mm shower grab rail complete with slider, handset and 1.5m hose. Water supply connection includes backflow prevention. Grab rail is accessible compliant when installed in accordance with AS1428.1.

### Technical Detail

Rail:	#304 Stainless Steel, Satin, 32mm Dia
Hose:	1.5m
Inlet Connection:	DN 15mm (1/2") BSP
	Includes backflow prevention
Water Pressure:	150-500 kpa
Water Temperature:	50°C Maximum
Flow Rate:	6.0 LPM
WELS:	5 Star
WELS Reg. Number	S14913

### Available Model

**RBA4110-993** 5 Star Shower Rail Set with slider, handset and 1.5m hose

### Related Products

**RBA4110-994** 5 Star Shower Rail Set with slider, handset and 1.5m hose & lever mixer

**RBA4110-936** 5 Star Shower T-Rail Set with slider, handset and hose | Right Hand


**RBA4110-937** 5 Star Shower T-Rail Set with slider, handset and hose | Left Hand

### Installation

Should be installed with RBA4000-075 to comply with AS1428.1. Warning: Grab rails are no stronger than the anchors or walls to which they are attached and must be firmly secured in order to support the loads for which they are intended.

**Note:** For Australia, Installation shall be in accordance with the PCA [Plumbing Code of Australia] and any relevant local authority requirements.

**Important:** Installation instructions and current rough-in details should be furnished with each fixture. Do not rough in without certified dimensions. Dimensions are subject to manufacturer's tolerance of +/-10mm.

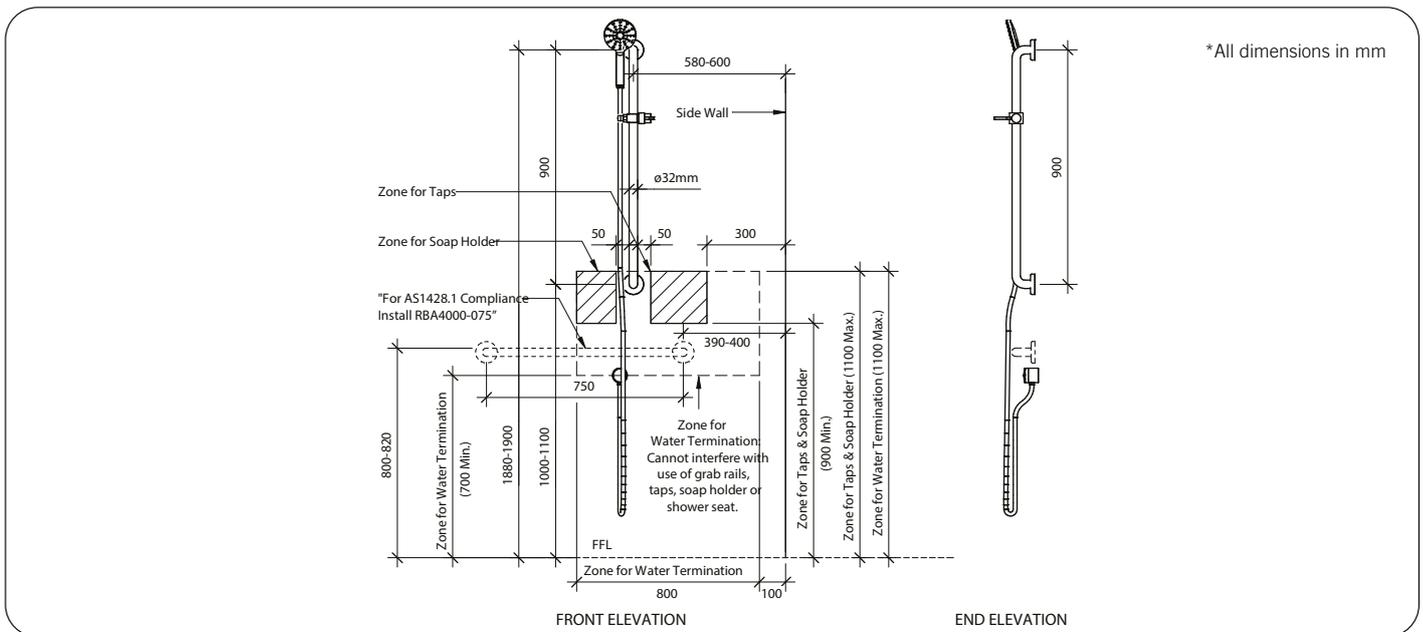

As improvements in the design and performance of RBA products are continuous, specifications may be subject to change without notice. The illustrations and descriptions herein are applicable to production as of the date of this Technical Data Sheet. Revised 12/22 © 2022 by RBA Group TD/Model RBA4110-993/1222