



The fitting of the appliance should only be carried out by a authorised person/licensed gasfitter. Please read the safety regulations. See the data plate for information regarding the total gas consumption, gas type and gas pressure.



Preparations for installation

Pictograms used




Important information



Gas connection




Electrical connection



Free space around appliance

Rangehoods and exhaust fans shall be installed in accordance with manufacturers instructions.

For an overhead exhaust fan A>750 mm!

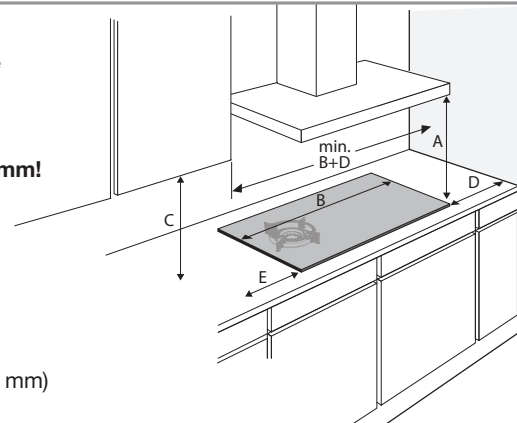

A (>mm)	C (>mm)	D (>mm)	E (> mm)
650	450	40	120



This appliance must be earthed

The electrical connection must comply with national and local regulations.

Connected load

	L1 (W)	L2 (W)	L3 (<W)	Total load (W)
HIG1995AD/HIG1995AF	3700	3700	5	7405




1/2" ISO 228 / 1/2" ISO 7-1




The gas connection must comply with national and local regulations.

The hotplate can be connected with rigid pipe as specified in AS/NZS 5601.1 current edition.


When the appliance is connected with a hose assembly, the supply point shall be accessible with the appliance installed.

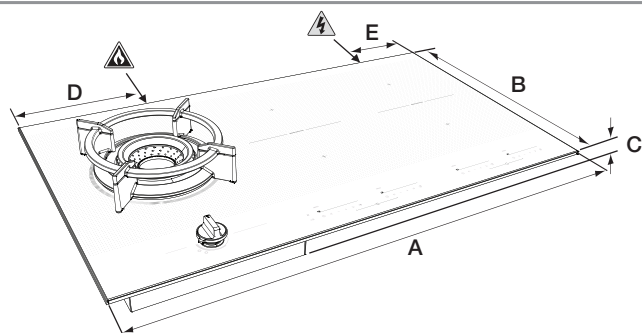


	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)
HIG1995AD/HIG1995AF	904	522	54	265	180

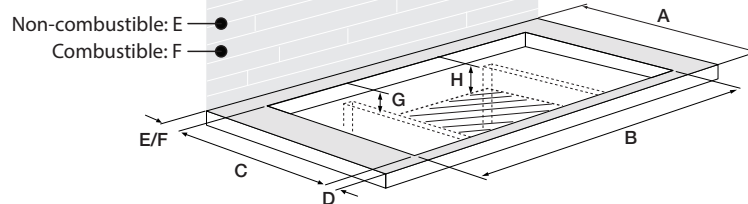


	A (mm)	B (mm)	C (mm)	D (>mm)	E (>mm)	F (>mm)	G	H
HIG1995AD/HIG1995AF	600	860	490	60	40	50	66	100

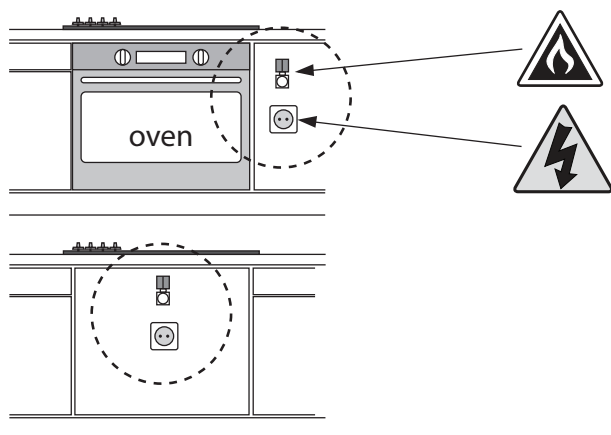

Accessibility!

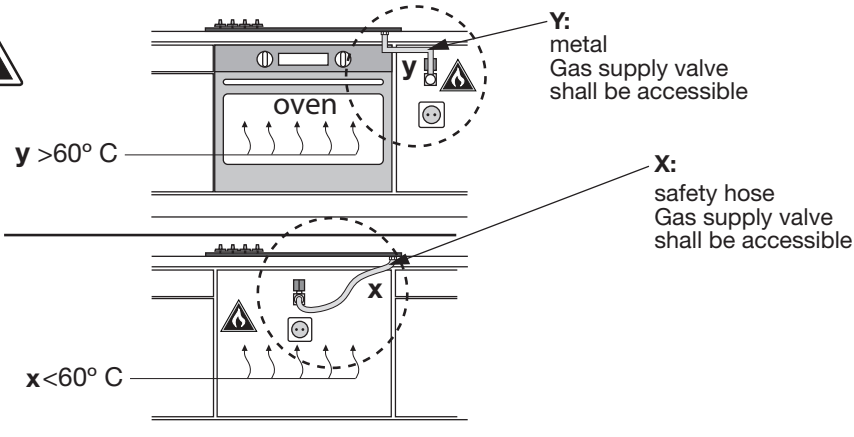


Placing sealing tape

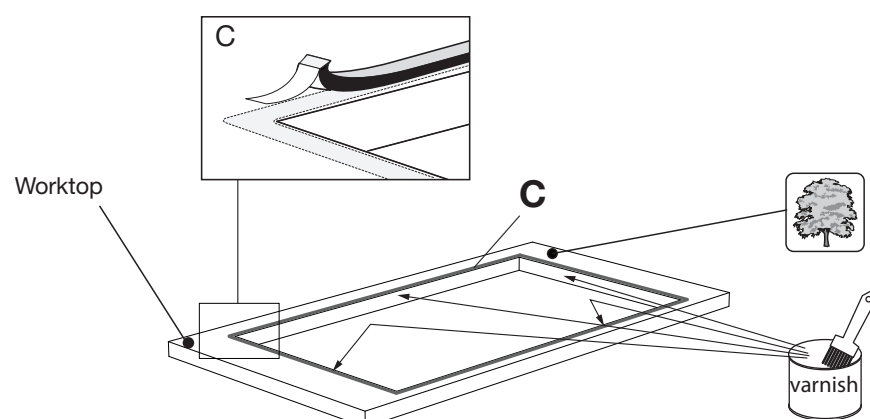



Gas connection

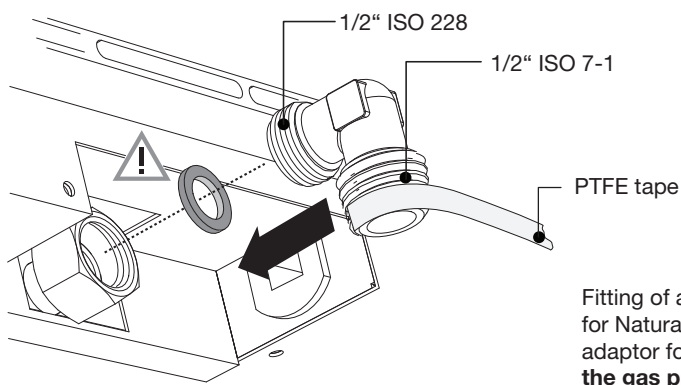

Fitting of appliance regulator for Natural gas or test point adaptor for LPG. **Check and set the gas pressure with appliance operating!**


GAS	BURNER	INJECTOR BURNER (MM)	ADJ. SCREW (MM)	BURNER RATE (MJ/h)	GAS PRESSURE (kPa)
N.G.	Wok (inner)	1.20 + 0.66	0.60	8.80	1.0
	Wok (outer)	2.10 + 0.66	0.60	19.70	
ULPG	Wok (inner)	0.63 + 0.40	0.34	7.50	2.75
	Wok (outer)	1.00 + 0.40	0.34	15.00	



Electrical connection


3N 380-415V 50/60Hz - 3x 16A
3 phases - 1 neutral

Cross sectional area 5x1,5mm²

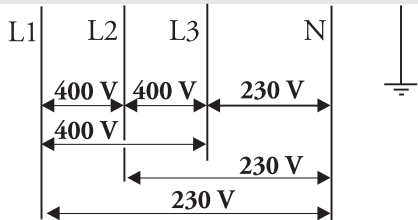


2N 380-415V 50/60Hz - 2x 16A
2 phases - 1 neutral

Cross sectional area 4x1,5mm²


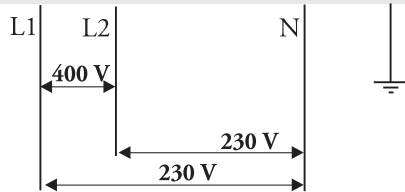


1N 220-240V 50/60Hz - 1x 32A
1 phase - 1 neutral



Cross sectional area 3x4mm²

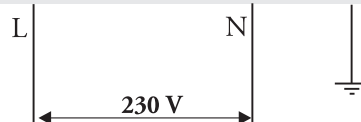

Consult the wiring diagrams on the underside of the appliance/Make the required connections on the connecting block.

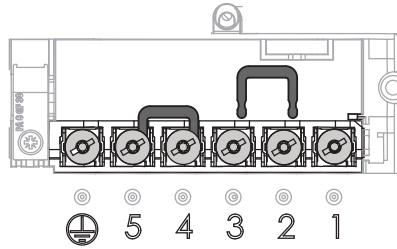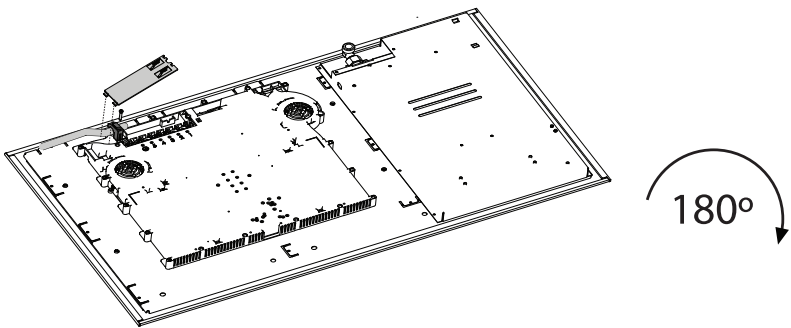

Ventilation

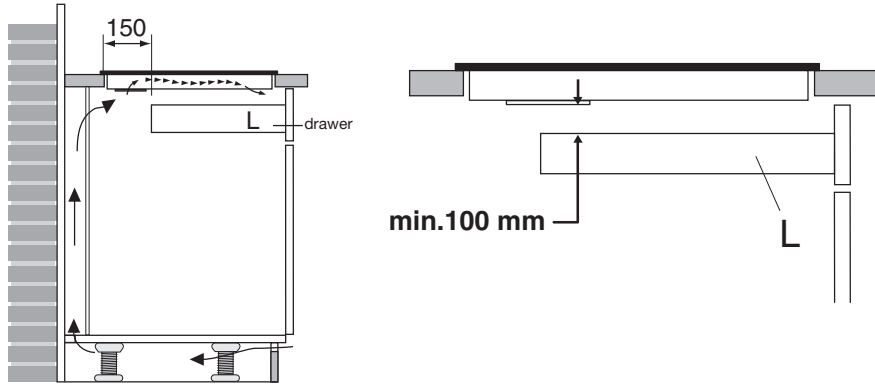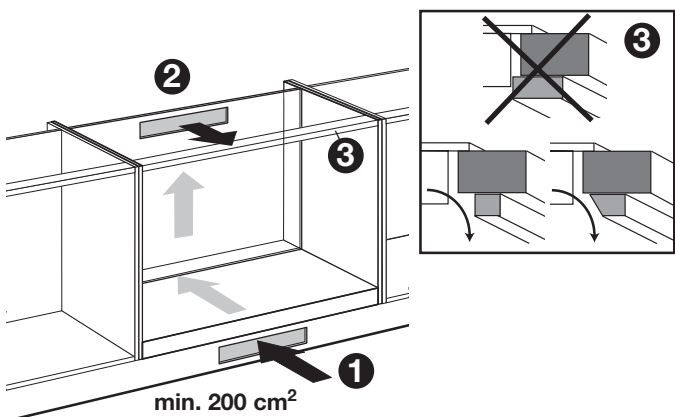

Check that the connections are gastight.
Test the working of the appliance!
Check the ignition of all burners individually and combined.